



EWP

ENERGIE WATER PUMP



MODEL: WPS50

CLEAR WATER PUMP

Diesel Powered Specification

4.2HP – 3.8kW Energie Engine

570 l/min

TECHNICAL DATA SHEET

FOR USE IN NON-REGULATED TERRITORIES ASIA MIDDLE EAST AND AFRICA

TECHNICAL INFORMATION

MODEL	
WPS50-M-SF	Manual Recoil Start with Steel Frame
APPLICATIONS	
Residential	Domestic Water Supply: Pumping water from wells, boreholes or storage tanks into the household distribution system. Ensures water reaches taps, showers and appliances at adequate pressure.
	Pressure Boosting: Used in houses where municipal supply is available, but water pressure is too low (example, multi-story buildings or areas with a weak supply). Booster pumps keep showers, washing machines and dishwashers running efficiently.
	Garden & Irrigation: Pumps used for watering lawns, flower beds, or vegetable gardens. Can be connected to sprinklers, drip irrigation or garden hoses
	Rainwater Harvesting Systems: Pumps transfer collected rainwater from storage tanks to toilets, washing machines or irrigation systems. Reduces reliance on municipal supply and lowers water bills.
Agricultural	Irrigation: Sprinkler systems for crops, orchards and vegetable fields. Drip irrigation setups for vineyards, greenhouses or row crops. Flood irrigation in small fields.
	Water Transfer: Moving water from rivers, canals, ponds or reservoirs to tanks or fields. Filling and emptying storage tanks or dams.
	Livestock & Farm Supply: Pumping water into troughs, tanks or reservoirs for cattle, sheep, poultry or dairy operations. Supplying water to remote farm buildings.
	Drainage & Flood Control: Removing excess rainwater from fields. Draining ditches, trenches or low-lying areas.

APPLICATIONS:

Residential

Agricultural

énergier
power products
DIESEL ENGINE

MD

MEDIUM DUTY

TECHNICAL INFORMATION

Engine

Make	Energie
Model	VPHLD220
Power	4.2HP – 3.8kW / 3600 RPM
Type	Single-Cylinder vertical 4-stroke air-cooled
Displacement	220cc / 0.22l
Fuel Type	Diesel
Starter	Recoil Start
Consumption	±374 g/kWh / 1.67 l/h
Noise	80dB at 7m
Fuel Tank Size	3.6l
Oil Tank Size	0.6l

Pump

Make	Energie
Model	WP50
Inlet and Outlet (inch)	2" 50mm / 2" 50mm
Delivery Volume	570 l/min
Max head	35m
Suction lift	8m
Driving Power	3kW
Pump Body	Aluminium Alloy
Impeller	Cast Iron
Mechanical Seal	Carbon-Ceramic
Working Speed	3600 RPM

Accessories Included

	Pipe Connector Fittings
	2 x 2 Inch Pipe Connecting Wrench
	Rubber Gaskets
	Suction Strainer
	Inlet Size: 50mm / 2"
	Material: Galvanized steel
Recommended Piping	
	Inlet Hose
	Material: Rubber or Neoprene
	Type: Reinforced synthetic rubber
	Thickness: 3-6mm
	Outlet Hose
	Material: Rubber or Neoprene
	Type: Reinforced synthetic rubber
	Thickness: 3-6mm

Permissible Pumping

Allowable Liquids	Clean water, freshwater, non-corrosive liquids
-------------------	--

Solid Handling

Pump	5mm
Restricted by Strainer	3mm

Fuels & Lubricants (Recommended)

Gasoline	50ppm or better
Oils	15W/40
Consumables (Service parts)	
Engine Air Filter	-
Engine Oil Filter	-
Engine Fuel Filter	-

Dimensions & Weights

Length	560 mm
Width	440 mm
Height	510 mm
Dry & Wet Weight	40 kg / 44.2 kg
Policies	
Warranty	1 Year Limited Warranty

TECHNICAL INFORMATION

Carbon Ceramic Seal Recommended Pumping Application

Clean Water

Tap water, well water and rainwater.

Slightly Dirty Water

Water with minor sand or suspended solids.

Non-corrosive or Mildly Corrosive Liquids

Mild acids or alkalis within pH 6-9

Slightly hot water (up to 80°C, depending on elastomers)

Carbon Ceramic Seal Not Recommended Pumping Application

Highly Corrosive Chemicals

Strong acids (e.g. hydraulic acid or sulfuric acid)

Strong alkalis (e.g. caustic soda or lye)

Oils and Fuels

Diesel, gasoline, kerosene and lubricating oils

Abrasive Slurries

Mud, sand, cement slurry, or liquids with solids larger than 5mm

Fibrous or Stringy Liquids

Leaves, hair, ropes or plant debris

Highly Viscous Liquids

Honey, syrup or thick industrial fluids

Silicon Carbide Seal Recommended Pumping Application

Clean Water

Tap water, well water or rainwater.

Slightly Dirty Water

Minor sand or suspended solids 2-3mm

Mild to Moderately Corrosive Liquids

Stronger acids and alkalis than carbon-ceramic can handle, provide pH is roughly 4-10

Hot water

Temperatures up to 100°C, depending on elastomer compatibility.

Light Chemical Solutions

Some industrial cleaning solutions, detergents or similar low-viscosity chemicals.

Silicon Carbide Seal Not Recommended Pumping Application

Strongly Abrasive Slurries

Liquids with large solids or heavy sand concentrations.

Highly Viscous Liquids

Honey, thick oils or syrups

Fibrous Materials

Leaves, hair or plant fibres

Highly Aggressive Chemical Beyond Elastomer Limits

Concentrated sulfuric acid, strong caustics above pH10 or halogens


Liquids Exceeding Temperature Limits of Pump Elastomers

Even if the seal is SiC, the pump casing and O-rings can Fail

PUMP CURVE

PERFORMANCE CURVE

WP50 WATER PUMP

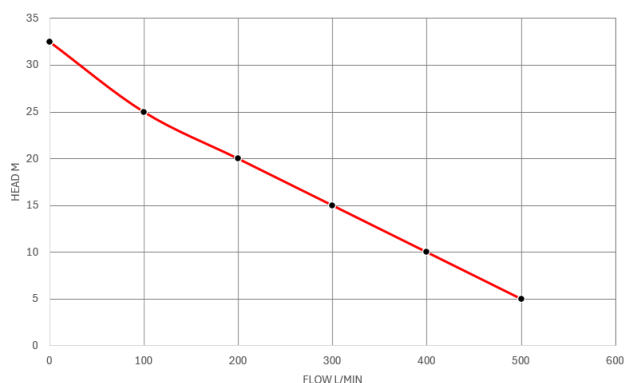

Flow (L/Min)	Head (M)
0	32,5
100	25
200	20
300	15
400	10
500	5

PRODUCT VIEWS

SIDE VIEW



BACK VIEW



SIDE VIEW



FRONT VIEW



ASSEMBLED & DISTRIBUTED BY:



Vert Energy Africa (Pty) Ltd
28A Cnr. Avalon & Private Roads,
Westlake View Ext 12, Modderfontein,
Johannesburg, Gauteng, South Africa

General Enquiries

+27 (0)11 453 9669

info@vertgroup.co.za

www.vertgroup.co.za

DEALER DETAILS
