

ALTERNATOR TECHNICAL DESCRIPTION
LSA 53.2 XL13 / 4p

LS Reference: TDS-MVH-1387
Enquiry reference: ENQ-25-0405

Date: 13-09-2025

V6.10h - 09/2025

Leroy-Somer
Electric Power Generation
Bangalore

Main data

Generator type:	LSA 53.2 XL13 / 4p		
Power:	3 050 kVA	2 440 kW _e	2 525 kW _m
Voltage:	6 600 V	Star serial	
Rated voltage range:	+5/-5%		
Power factor - Lagging:	0.8		
Frequency:	50	Hz	
Speed:	1 500	RPM	
Nominal current:	267	A	
Winding type:	p5/6		
Classes (Insulation / Temperature Rise):	H / F		
Ambient temperature:	40	°C	
Altitude:	1 000	m	

Installation

Prime mover:	Reciprocating engine
Manufacturer:	-
Type:	-
Duty:	Base Rating

Mechanical construction

Type of construction:	Single bearing
Mounting arrangement:	Horizontal Axis
Direction of rotation:	Clockwise (when facing the drive end - DE)
Bearing type:	Anti-friction
Bearing Lubrication:	Regreasable
Bearing insulation:	Not insulated
Flector type:	Cylindrical with keyway
Balancing - Class:	Half key - G2,5 (std)
Shaft height:	Customer to confirm
Width:	Customer to confirm

Additional specificities

Stabilized Runaway speed:	1 800 rpm - 2 min.
---------------------------	--------------------

Cooling Method

IC01

Degree of protection:	IP23
Coolant:	Air / Temperature: 40 °C
Air quality:	Clean
Ventilation (internal):	Self-ventilated
Filters:	Without
Ducting for air inlet:	No
Ducting for air outlet:	No

ALTERNATOR TECHNICAL DESCRIPTION
LSA 53.2 XL13 / 4p

LS Reference: TDS-MVH-1387
 Enquiry reference: ENQ-25-0405

Connection, Excitation & Regulation

Parallel operation:	Between alternators (1F) - 1 x Droop CT
Excitation:	Self-excited - Brushless: AREP + PMI
Sustained 3-phase Isc:	> 3 x FLC for 10s.
AVR type:	Leroy Somer - D550 - Digital
AVR location:	In terminal box
Alternator Voltage sensing:	Terminal box mounted voltage sensing VTs

Terminal box

Power connection:	4 connectors (brought out neutral)
Main terminal box location:	1 terminal box on the top
Line side outlet:	Left hand side (seen when facing the drive end - D)
Auxiliaries	In main terminal box

Protection and measurement accessories

Temperature detection

Stator windings:	6 x PT100 (3 wires)
NDE bearing:	1 x PT100 per bearing (3 wires)

Anti-condensation heating

Alternator:	Voltage: 230 V - 1Ph / Power: 2x250 W
-------------	---------------------------------------

Various items

Paint:	Customer to confirm
Documentation:	PDF maintenance manual
Documentation Language:	English

ALTERNATOR ELECTRICAL DATA LSA 53.2 XL13 / 4P

LS Reference: TDS-MVH-1387

Date: 13-09-2025

V6.10h - 09/2025

Main data:

Power:	3 050 kVA	2 440 kWe	2 525 kWm
Voltage:	6600 V	Frequency:	50 Hz
Rated voltage range:	+5% / -5%	Speed:	1500 rpm
Power factor - Lagging:	0.8	Phases	3
Nominal current:	267 A	Connexion	Star serial
Insulation / Temperature rise:	H / F	Winding type:	p5/6
Cooling:	IC01	Winding:	- 6 Wires
Ambient temperature:	40 °C	Overspeed (rpm)	1800
Altitude:	1000 m	Total Harmonic Distortion (THD)	< 1.5%
Duty: Base Rating			

Efficiency (Base 2440 kWe)

	25%	50%	75%	100%	110%
Power factor - Lagging: 0.8	94.40	96.35	96.70	96.65	96.58
Power factor - Lagging: 1	94.76	96.88	97.38	97.50	97.50

Reactances (%) - (Base 3050 kVA)

Unitary impedance (1 per unit) = 14.281967 ohms

		Unsaturated		Saturated		
		Direct axis	Quadrature axis	Direct axis	Quadrature axis	
Synchronous reactance	Xd	255	220	Xq	130	112
Transient reactance	X'd	26.2	22.3	X'q	130	112
Subtransient reactance	X''d	14.2	12.0	X''q	14.9	12.6
Negative sequence reactance	X2	14.5	12.3			

X0	10.4	Zero sequence reactance
XI	7.1	Stator leakage reactance
Xr	20.7	Rotor leakage reactance
Kc	0.46	Short-circuit ratio

Time constants (s)

	Direct axis		Quadrature axis	
Open circuit transient time constant	T'do	3.28	T'qo	NA
Short-circuit transient time constant	T'd	0.337	T'q	NA
Open circuit subtransient time constant	T''do	0.037	T''qo	0.157
Subtransient time constant	T''d	0.020	T''q	0.018

Ta = 0.041 Armature winding short circuit time constant

Resistances (%)

Ra	1.1	Armature resistance	R0	3.5	Zero sequence resistance
X/R	10.7	X/R ratio (without unit)	R2	2.9	Negative sequence resistance

Voltage accuracy: 0.25%

Maximum inrush current for a voltage dip of 15%: 2285 kVA
when starting an AC motor having a starting power factor between 0 and 0.4

Rating is provided for the specified temperature rise, by resistance measurement according to IEC60034-1

According to: I.E.C. 60034.1 - 60034.2 - NEMA MG 1-32

Products and materials shown in this catalogue may, at any time, be modified in order to follow the latest technological developments,

improve the design or change conditions of utilization.

ALTERNATOR MAIN CURVES LSA 53.2 XL13 / 4P

LS Reference: TDS-MVH-1387


Date: 13-09-2025

3050kVA - 6600V - 50 Hz

V6.10h - 09/2025


Capability Curve

---	Umax	+ 5%	6 930	V
—	Un		6 600	V
- - -	Umin	- 5%	6 270	V

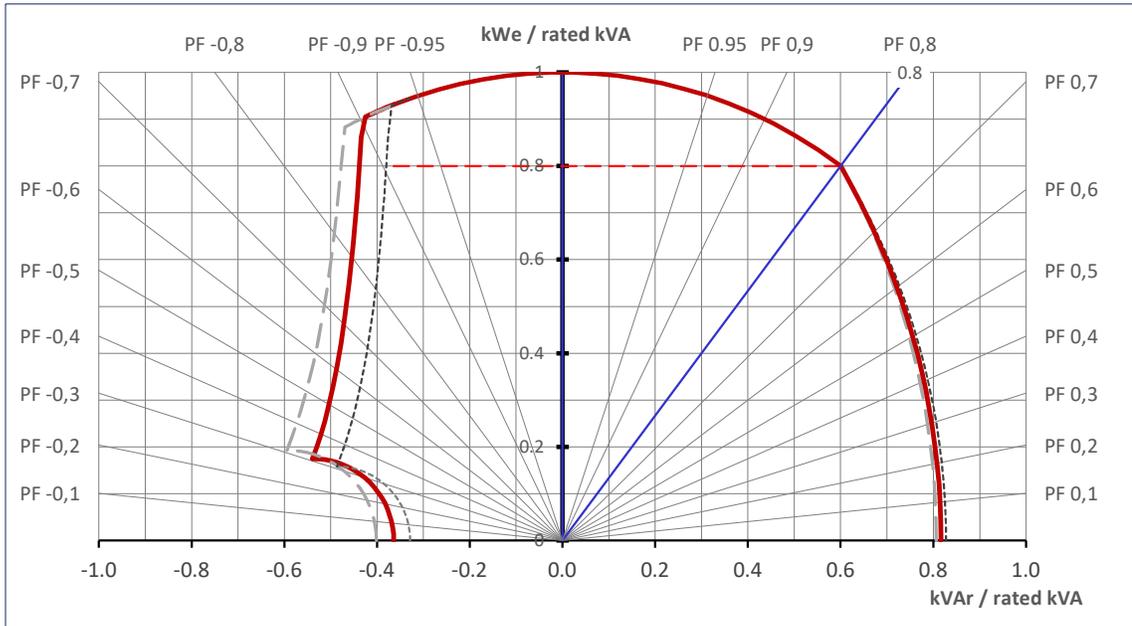

Efficiency Curves

According to: IEC

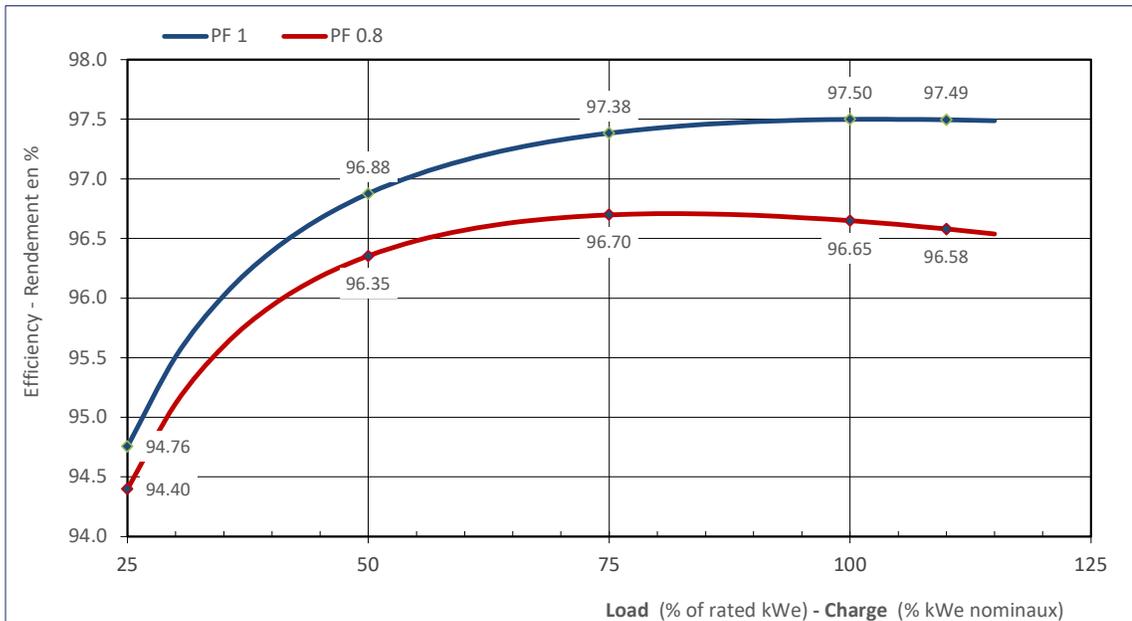


ALTERNATOR MAIN CURVES
LSA 53.2 XL13 / 4P


LS Reference: TDS-MVH-1387

Stator Current decrement curves

Symmetrical phase to neutral short-circ	—	initial	2 285	A	8.6 x In	
Symmetrical two phase short-circuit	- - -	max	1 875	A	7 x In	In = 267 A
Symmetrical three phase short-circuit	—	value	2 167	A	8.1 x In	
Thermal Limit	—					

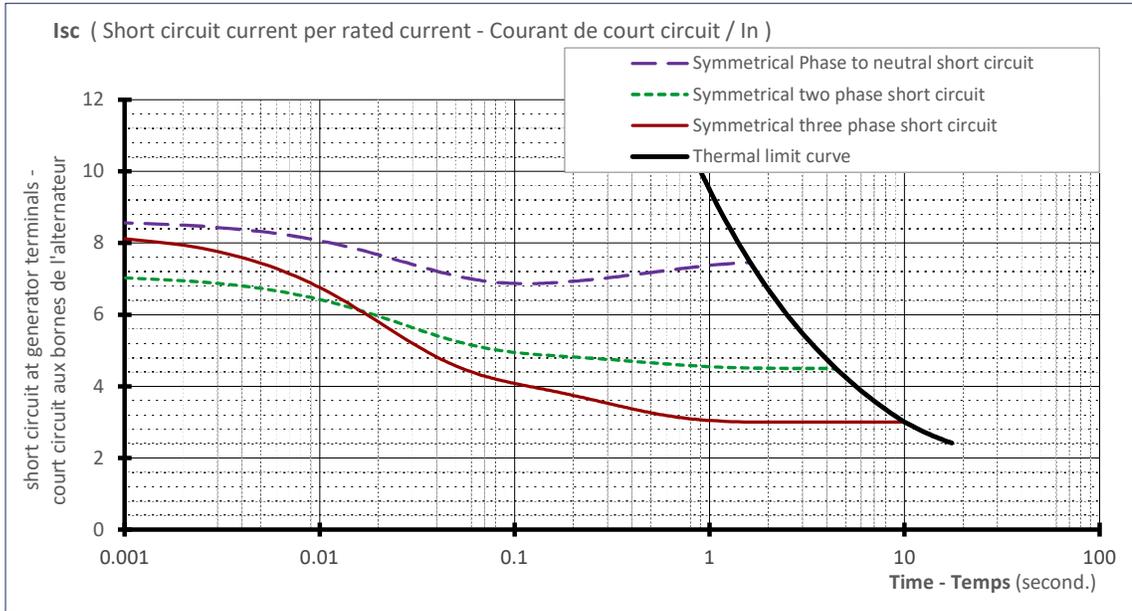



Asymmetrical three phase short-circuit — IP 5 207 A 19.5 x In

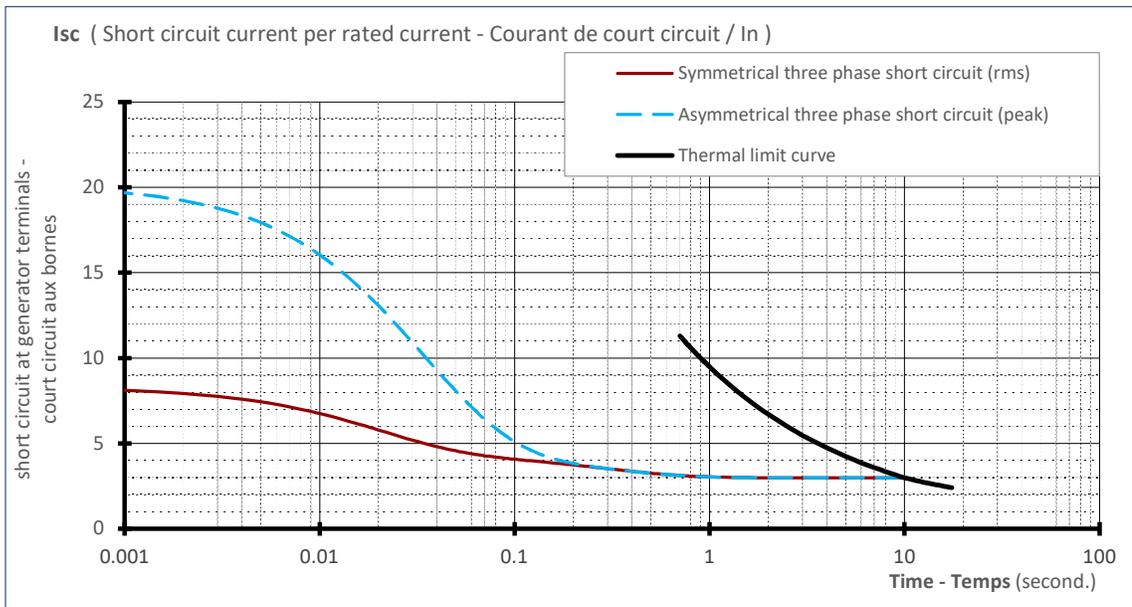

ALTERNATOR MAIN CURVES
LSA 53.2 XL13 / 4P

LS Reference: TDS-MVH-1387


Transient Voltage Variation

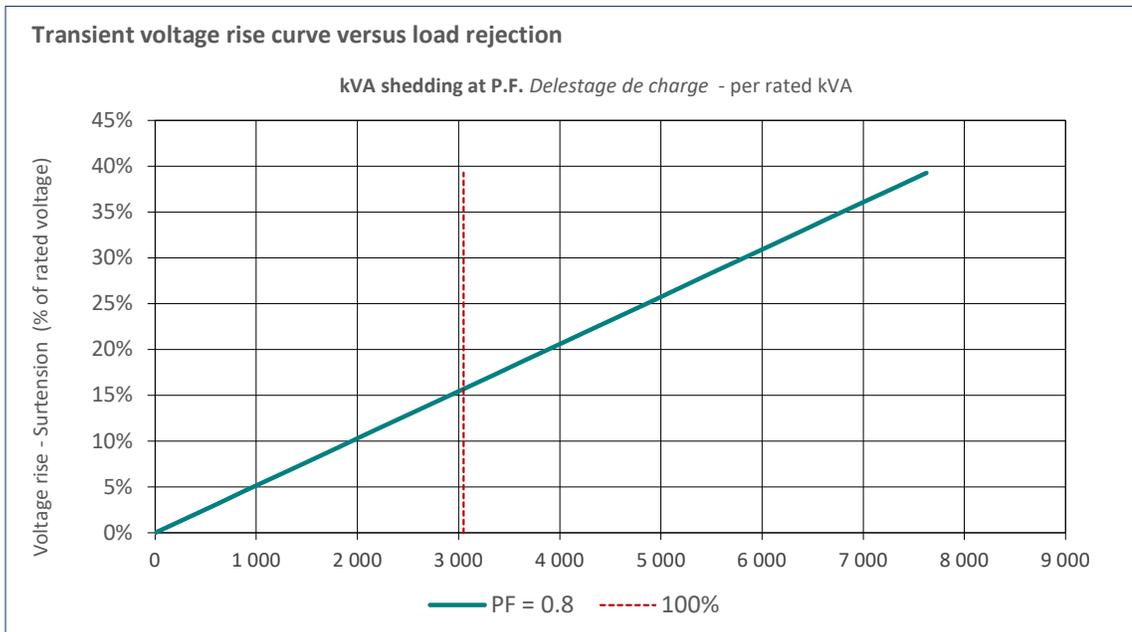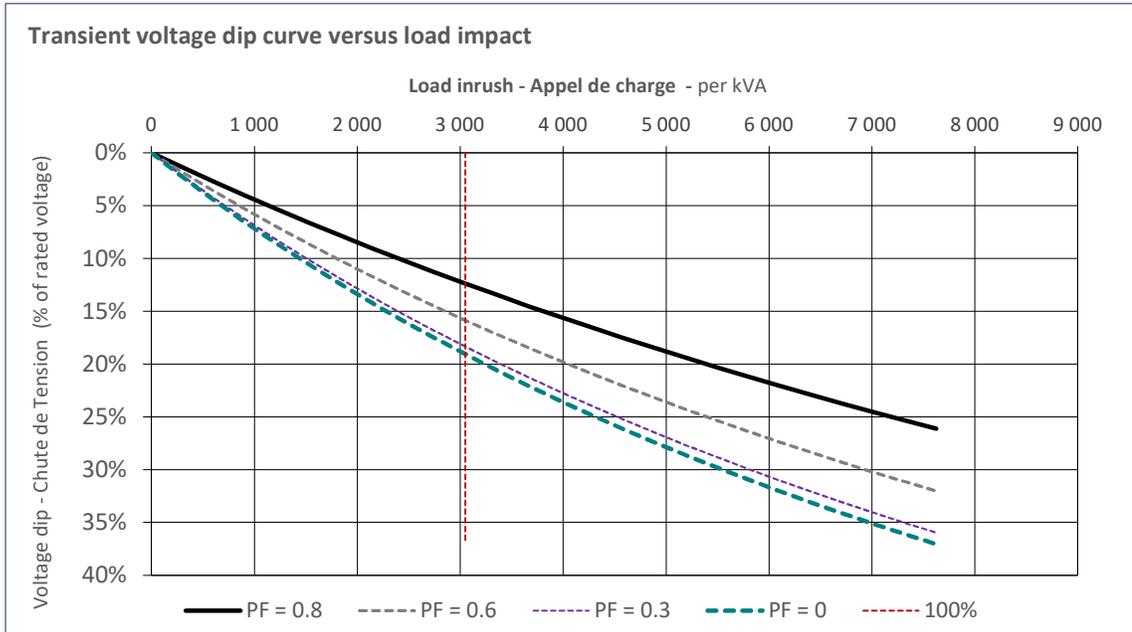


ALTERNATOR MAIN CURVES
LSA 53.2 XL13 / 4P

LS Reference: TDS-MVH-1387

Thermal Damage Curve

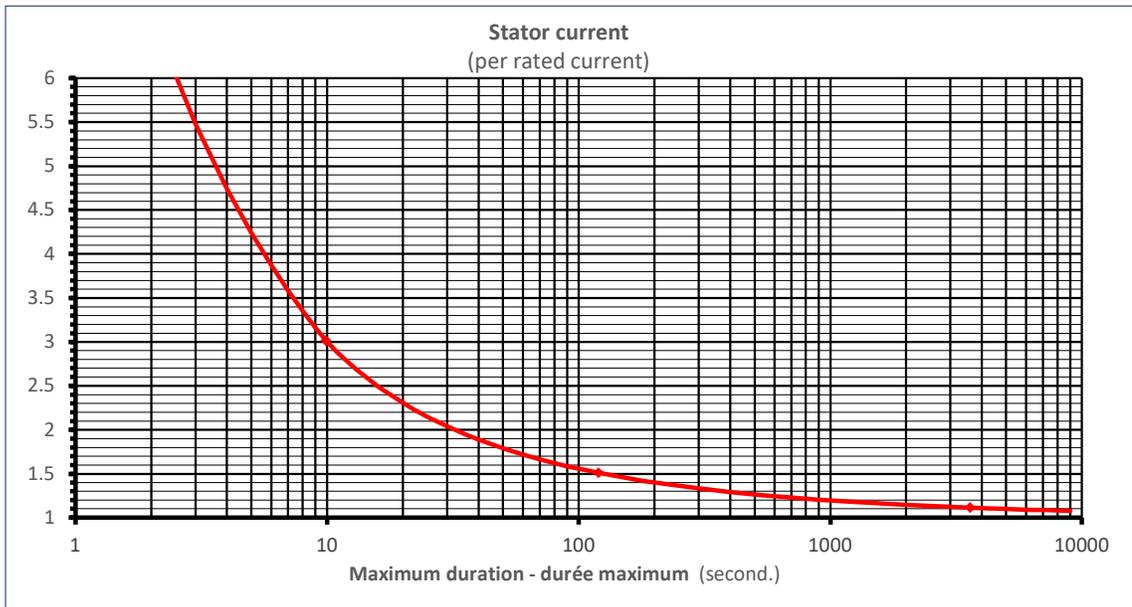

Unbalance Load Curve

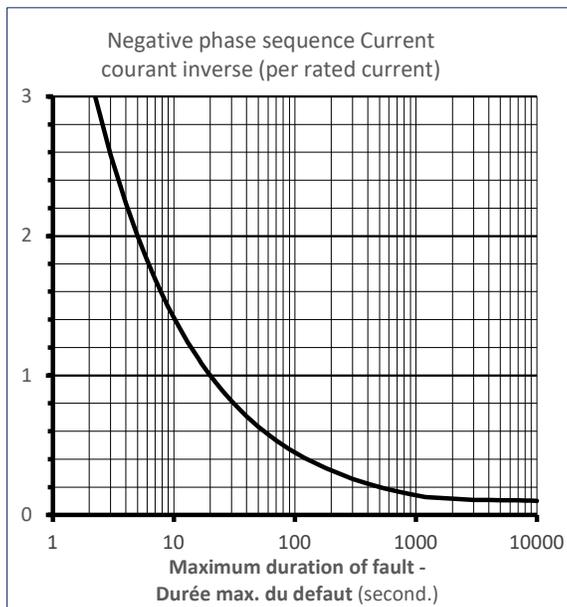

Stator Earth Fault Current

