


Nidec

Power

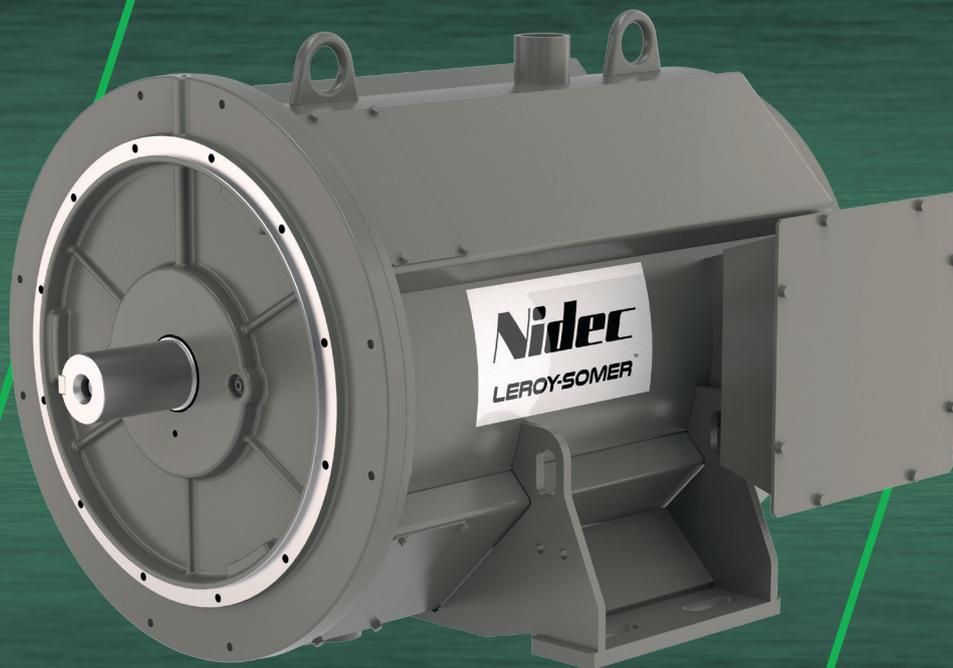

LSAH 44.3

Low Voltage Alternator - 4 poles

40 to 75 kVA - 50 Hz / 50 to 94 kVA - 60 Hz

Electrical and mechanical data

LEROY-SOMER[™]

LSAH 44.3

The best of performance

The Leroy-Somer™ LSAH 44.3 alternator has been designed to maximize efficiency of cogeneration installations. Thanks to its specific built-in coolant circuit, heat recovery is optimized and directly fed into the larger installation. The Leroy-Somer™ LSAH 44.3 alternator is also perfectly suited for continuous service connected to the national grid and other applications like oil and gas. The various design elements and construction features of the Leroy-Somer™ LSAH 44.3 alternator make it highly performant and durable.

Standards

The Leroy-Somer™ LSAH 44.3 alternator meets all key international standards and regulations such as IEC 60034, NEMA MG 1.32-33, ISO 8528-3, CSA C22.2 n°100-14, UL 1446, UL 1004-1 and UL 1004-4. EC, UKCA, CMIM, CSA, UL 1446 and UL recognized declarations and certifications are available for the LSAH 44.3. The standards IEC 61000-6-2, IEC 61000-6-3, IEC 61000-6-4, VDE 0875G, VDE 0875N and EN 55011 allow compliance with group 1 class A for the European zone. The Leroy-Somer™ LSAH 44.3 alternator is designed, manufactured and marketed in an ISO 9001 and ISO 14001 quality assurance environment.

Electrical characteristics and performances

- Class H insulation
- 2/3 pitch winding, standard 6-wire (6S) reconnectable
- Voltage range:
 - 50 Hz: 380V/400V/415V
 - 60 Hz: 380V/440V/480V
- Other voltages: consult us
- High efficiency and motor starting capacity

Excitation and regulation system

Excitation system		Regulation options		
AVR	AREP	C.T. Current transformer for paralleling	Mains paralleling	Remote voltage potentiometer
D350	Standard	√		√
D550	Option	√	√	√

3-phase sensing is included as a standard with digital regulators.

Protection system and options

- Designed for an operating environment up to 80°C and a maximum cooling liquid temperature of 75°C
- Water flow: 3 to 10 m³/h
- pH of water: 7 < pH < 8
- Degree of protection: IP 44 (option: IP55/IP56)
- Enclosed machine cooled by heat transfer fluid
- Options:
 - Double terminal box
 - Space heater
 - Bearing sensors
 - Thermal protection for stator windings (PT100 sensors)
 - Shaft height: adapted on request
 - Remote voltage potentiometer
 - Current transformer for parallel operation
 - Single-bearing configuration
 - Reinforced paint for harsh environment

Mechanical construction

- Compact rigid assembly to better withstand generator vibrations
- Steel frame and terminal box
- Cast iron flanges and shields
- Two-bearing and single-bearing mounting
- Half-key balancing
- Greasable ball bearings: 40 000h
- Direction of rotation: clockwise and anti-clockwise (without derating)
- Noise level: 81 dBA (IEC 60034-9)
- Output cable direction: left or right

Terminal box design

- Remote voltage regulator (AVR not mounted in terminal box)
- Terminal block for voltage reconnection
- Terminal block on the left or right, or both sides (with extra cost)

LSAH 44.3 - 40 to 75 kVA - 50 Hz / 50 to 94 kVA - 60 Hz

General characteristics

Insulation class	H	Excitation system	AREP
Winding pitch	2/3 (wind. 6S)	AVR type	D350
Number of wires	6	Voltage regulation (*)	± 0.25 %
Protection	IP 44	Short-circuit current	300 % (3 IN) : 10s
Cooling - Code	Water - IC7A1W7	Total Harmonic Distortion THD (**) in no-load	< 2 %
Altitude	≤ 1 000 m	Total Harmonic Distortion THD (**) in linear load	< 5 %
Overspeed	2 250 R.P.M.	Waveform: NEMA = TIF (**)	< 50
Water flow	3 to 10 m ³ /h	Waveform: IEC = THF (**)	< 1.5 %

(*) Steady state (**) Total harmonic distortion between phases, no-load or on-load (non-distorting)

Ratings 50 Hz - 1 500 R.P.M.

Duty max. / T° C	Continuous / 80 °C (environment) - 75 °C (liquid)																	
Class / T° K	F / 70° K (Standard)						B / 45° K						H / 90° K					
Y	P.F. 1			P.F. 0.8			P.F. φ 1			P.F. φ 0.8			P.F. φ 1			P.F. φ 0.8		
	380V	400V	415V	380V	400V	415V	380V	400V	415V	380V	400V	415V	380V	400V	415V	380V	400V	415V
LSAH 44.3 M4 kVA	40	40	40	50	50	50	32	32	32	40	40	40	44	44	44	55	55	55
kW	40	40	40	40	40	40	32	32	32	32	32	32	44	44	44	44	44	44
LSAH 44.3 M6 kVA	52	52	52	65	65	65	42	42	42	52	52	52	57	57	57	71	71	71
kW	52	52	52	52	52	52	42	42	42	42	42	42	57	57	57	57	57	57
LSAH 44.3 L8 kVA	60	60	60	75	75	75	48	48	48	60	60	60	66	66	66	82	82	82
kW	60	60	60	60	60	60	48	48	48	48	48	48	66	66	66	66	66	66
LSAH 44.3 VL12 kVA	75	75	75	94	94	94	60	60	60	75	75	75	83	83	83	104	104	104
kW	75	75	75	75	75	75	60	60	60	60	60	60	83	83	83	83	83	83

Ratings 60 Hz - 1 800 R.P.M.

Duty max. / T° C	Continuous / 80 °C (environment) - 75 °C (liquid)																	
Class / T° K	F / 70° K (Standard)						B / 45° K						H / 90° K					
Y	P.F. 1			P.F. 0.8			P.F. φ 1			P.F. φ 0.8			P.F. φ 1			P.F. φ 0.8		
	380V	440V	480V	380V	440V	480V	380V	440V	480V	380V	440V	480V	380V	440V	480V	380V	440V	480V
LSAH 44.3 M4 kVA	40	46	50	49	57	62	32	37	40	40	46	50	44	50	55	55	63	69
kW	40	46	50	39	46	50	32	37	40	32	37	40	44	50	55	44	50	55
LSAH 44.3 M6 kVA	49	57	62	62	72	78	40	46	50	49	57	62	54	62	68	67	78	85
kW	49	57	62	50	58	62	40	46	50	39	46	50	54	62	68	54	62	68
LSAH 44.3 L8 kVA	59	69	75	74	86	94	48	55	60	59	69	75	66	76	83	82	94	103
kW	59	69	75	59	69	75	48	55	60	47	55	60	66	76	83	66	75	82
LSAH 44.3 VL12 kVA	74	86	94	93	107	117	59	69	75	74	86	94	82	95	104	103	119	130
kW	74	86	94	74	86	94	59	69	75	59	69	75	82	95	104	82	95	104

Temperature and Power

Power adjustment factor according to the coolant temperature





Coolant T °C	40 - 50 °C	60 - 75 °C	85 - 95 °C
Factor	1.03	1	0.97

Max ΔT water (outlet vs inlet) at water temperature 40 °C to 75 °C

Class B	Class F	Class H
0.5 K	0.7 K	0.9 K

LSAH 44.3 - 40 to 75 kVA - 50 Hz / 50 to 94 kVA - 60 Hz

Efficiencies 400V - 50 Hz (--- P.F.: 0.8) (— P.F.: 1) - Class F

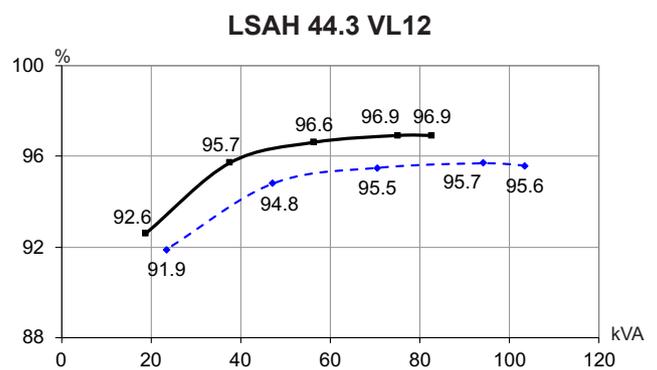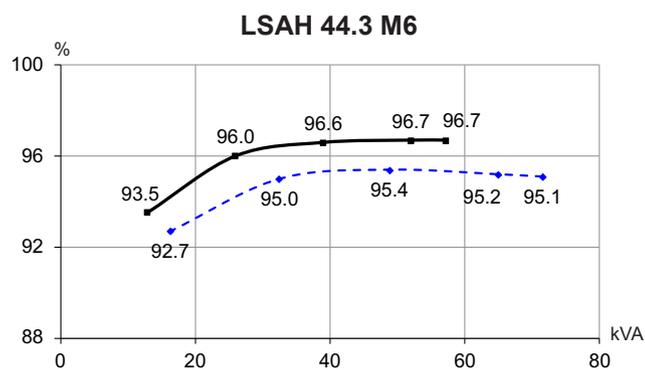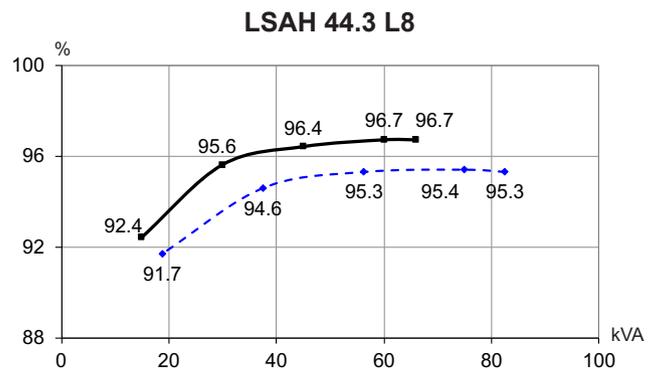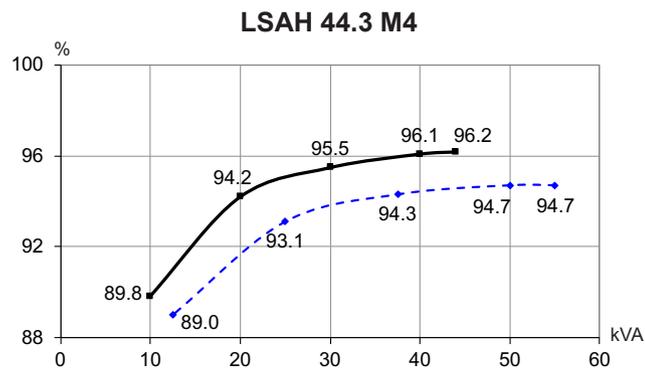

Reactances (%). Time constants (ms) - Class F / 400 V - P.F. 1




	M4	M6	L8	VL12
Kcc Short-circuit ratio	1.28	0.67	0.93	0.99
Xd Direct-axis synchronous reactance unsaturated	119	179	150	140
Xq Quadrature-axis synchronous reactance unsaturated	61	91	76	71
T'do No-load transient time constant	1 802	1 921	2 024	2 253
X'd Direct-axis transient reactance saturated	6.6	9.3	7.4	6.2
T'd Short-circuit transient time constant	100	100	100	100
X''d Direct-axis subtransient reactance saturated	3.9	5.5	4.4	3.7
T''d Subtransient time constant	10	10	10	10
X''q Quadrature-axis subtransient reactance saturated	6.9	9.8	7.8	6.7
Xo Zero sequence reactance	0.27	0.38	0.3	0.26
X2 Negative sequence reactance saturated	5.47	7.73	6.16	5.25
Ta Armature time constant	15	15	15	15

Other class F / 400 V data

io (A) No-load excitation current AREP	1.08	0.74	0.94	0.94
ic (A) On-load excitation current AREP	1.4	1.35	1.42	1.39
uc (V) On-load excitation voltage AREP	11.2	10.8	11.4	11.1
ms Response time ($\Delta U = 20\%$ transient)	500	500	500	500
kVA Start ($\Delta U = 20\%$ continuous or $\Delta U = 30\%$ transient) AREP*	275	255	371	550
% Transient ΔU (on-load 4/4) AREP - P.F.: 1 _{LAG}	4.8	4.8	4.8	4.8
W No-load losses	1 212	947	1 289	1 598
W Heat dissipation	1 602	1 740	2 006	2 374





* P.F. = 0.6

Transient voltage variation 400V - 50 Hz - Class F

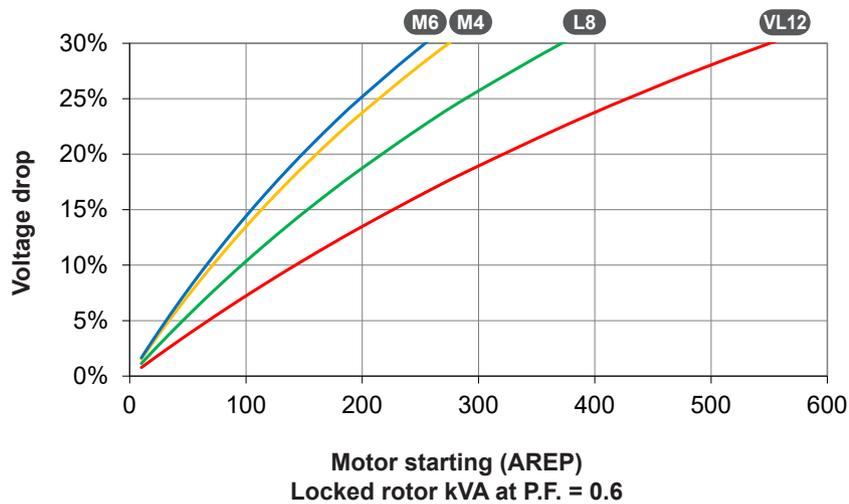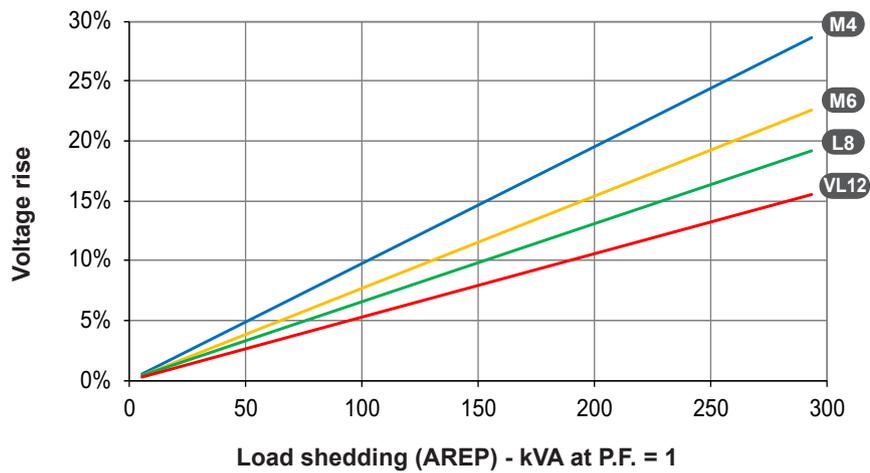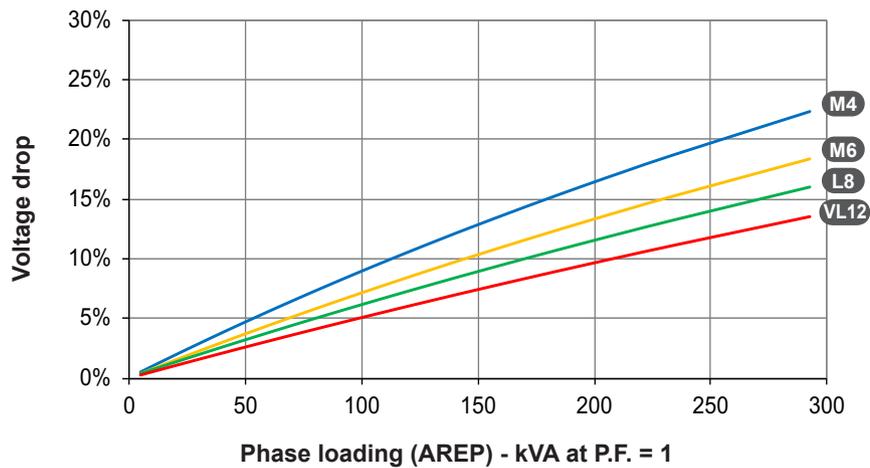

- 1) For a starting P.F. other than 0.6, the starting kVA must be multiplied by $K = \text{Sine P.F.} / 0.8$
- 2) For voltages other than 400V (Y), 230V (Δ) at 50 Hz, then kVA must be multiplied by $(400/U)^2$ or $(230/U)^2$.

Efficiencies 480V - 60 Hz (--- P.F.: 0.8) (— P.F.: 1) - Class F

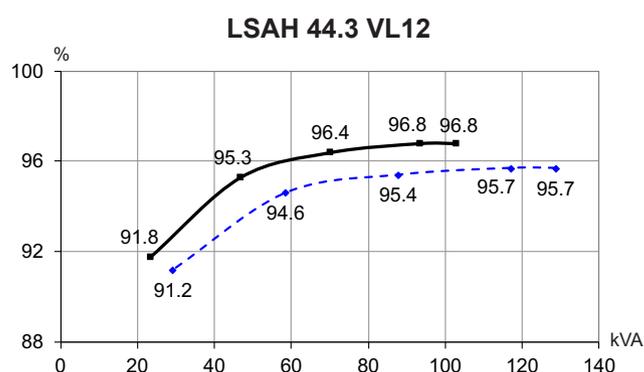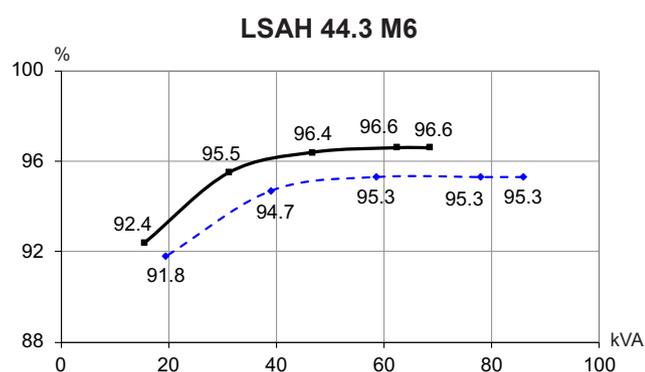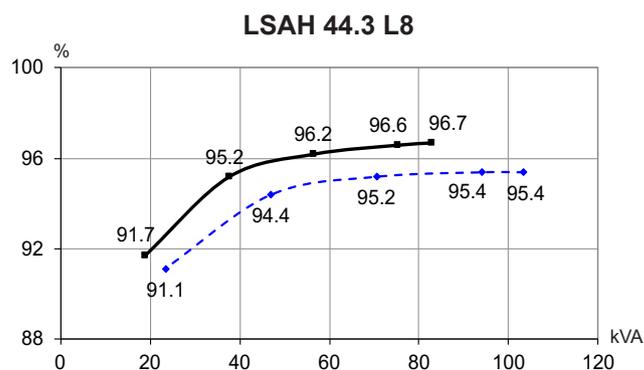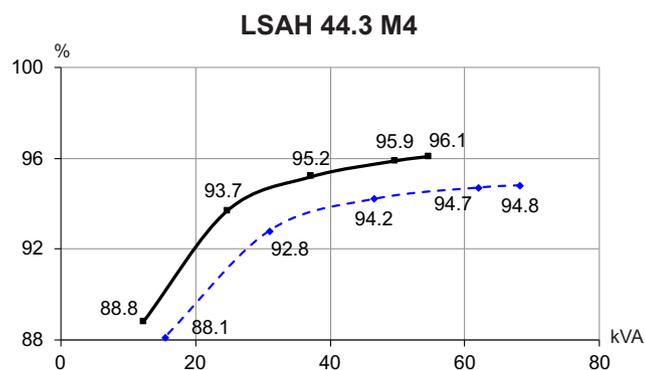

Reactances (%). Time constants (ms) - Class F / 480 V - P.F. 1




	M4	M6	L8	VL12
Kcc Short-circuit ratio	1.24	0.67	0.89	0.96
Xd Direct-axis synchronous reactance unsaturated	123	179	156	146
Xq Quadrature-axis synchronous reactance unsaturated	63	91	79	74
T'do No-load transient time constant	1 802	1 921	2 024	2 253
X'd Direct-axis transient reactance saturated	6.8	9.3	7.7	6.4
T'd Short-circuit transient time constant	100	100	100	100
X''d Direct-axis subtransient reactance saturated	4.1	5.5	4.6	3.8
T''d Subtransient time constant	10	10	10	10
X''q Quadrature-axis subtransient reactance saturated	7.1	9.8	8.2	7
Xo Zero sequence reactance	0.28	0.38	0.32	0.27
X2 Negative sequence reactance saturated	5.65	7.73	6.43	5.44
Ta Armature time constant	15	15	15	15

Other class F / 480 V data

	M4	M6	L8	VL12
io (A) No-load excitation current AREP	1.08	0.74	0.94	0.94
ic (A) On-load excitation current AREP	1.41	1.34	1.45	1.4
uc (V) On-load excitation voltage AREP	11.3	10.8	11.6	11.2
ms Response time ($\Delta U = 20\%$ transient)	500	500	500	500
kVA Start ($\Delta U = 20\%$ continuous or $\Delta U = 30\%$ transient) AREP*	331	306	443	657
% Transient ΔU (on-load 4/4) AREP - P.F.: 1 _{LAG}	4.8	4.8	4.8	4.8
W No-load losses	1 696	1 373	1 823	2 253
W Heat dissipation	2 083	2 163	2 601	3 081

* P.F. = 0.6

Transient voltage variation 480V - 60 Hz - Class F

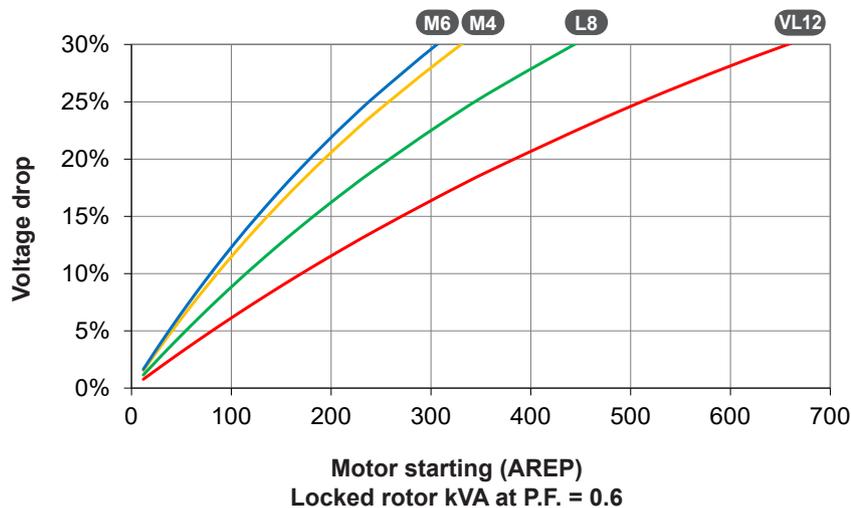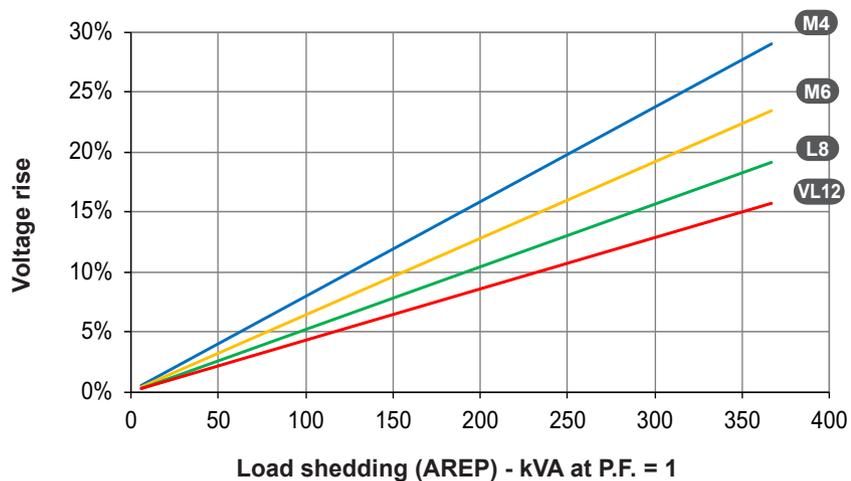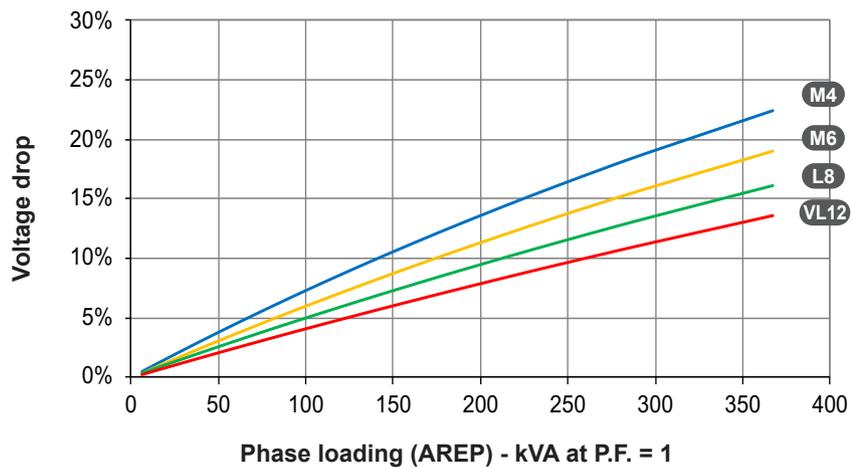


1) For a starting P.F. other than 0.6, the starting kVA must be multiplied by $K = \text{Sine P.F.} / 0.6$
 2) For voltages other than 480V (Y), 277V (Δ), 240V (YY) at 60 Hz, then kVA must be multiplied by $(480/U)^2$ or $(277/U)^2$ or $(240/U)^2$.

3-phase short-circuit curves at no load and rated speed (star connection Y) - Class F


LSAH 44.3 M4

Symmetrical —
Asymmetrical - - -

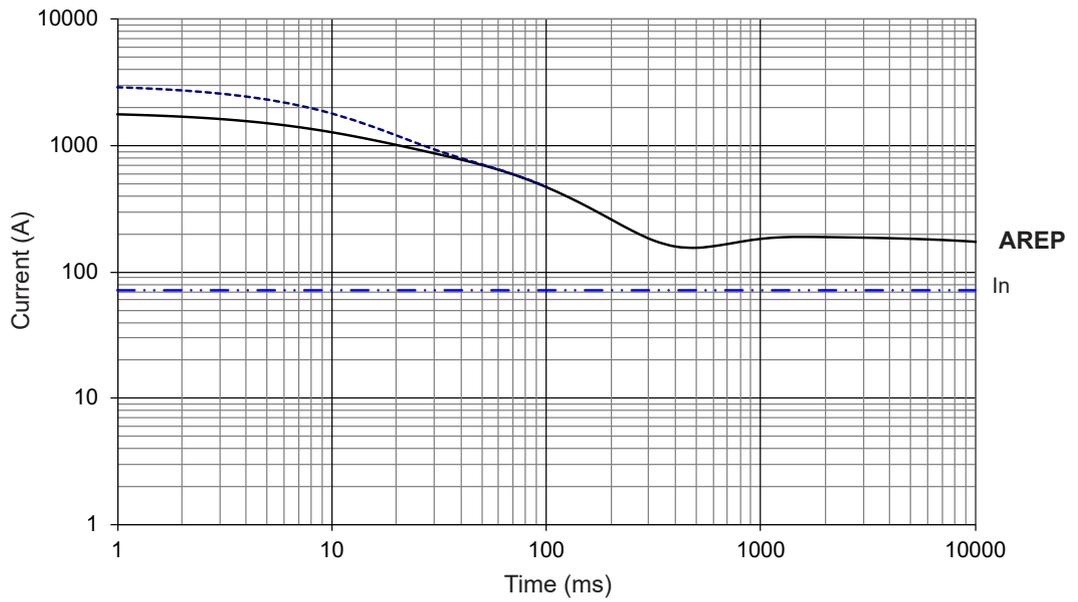

LSAH 44.3 M6

Symmetrical —
Asymmetrical - - -

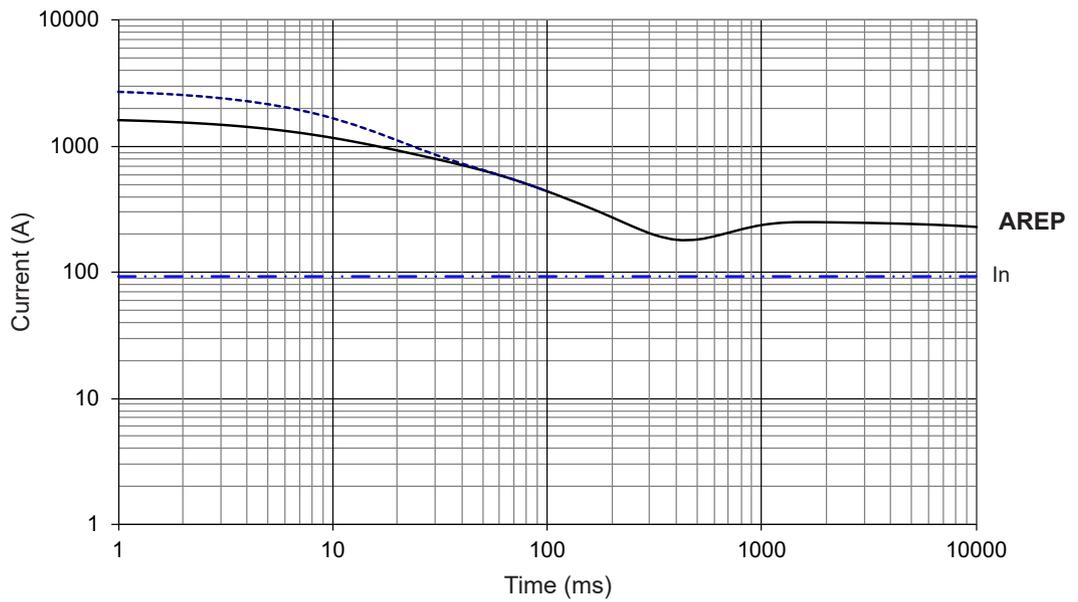

Influence due to connection


For (Δ) connection, use the following multiplication factor:

- Current value x 1.732.

3-phase short-circuit curves at no load and rated speed (star connection Y) - Class F


LSAH 44.3 L8

Symmetrical —
Asymmetrical - - -

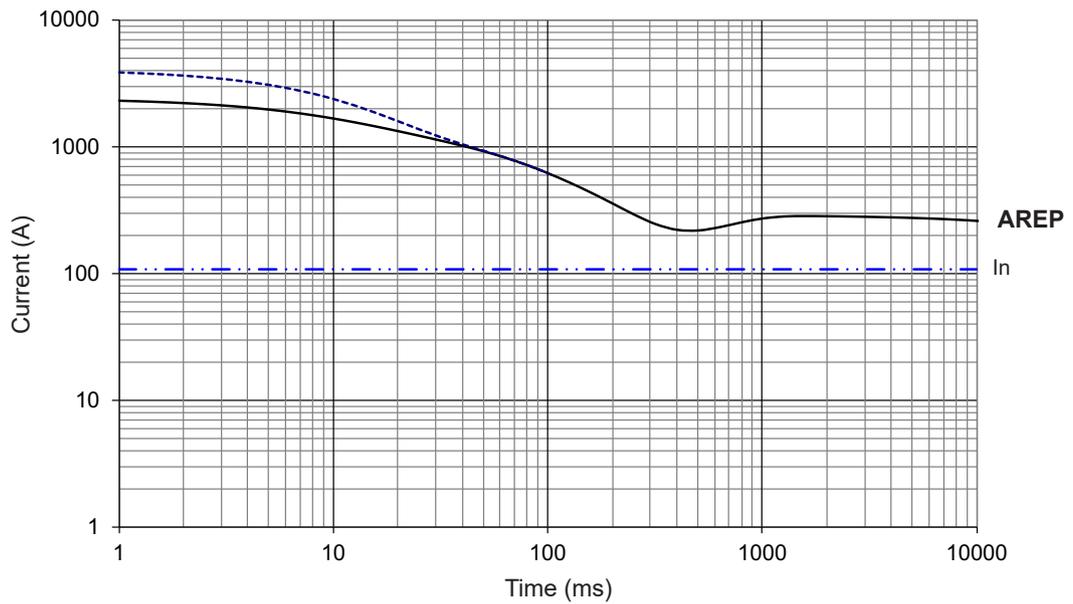

LSAH 44.3 VL12

Symmetrical —
Asymmetrical - - -

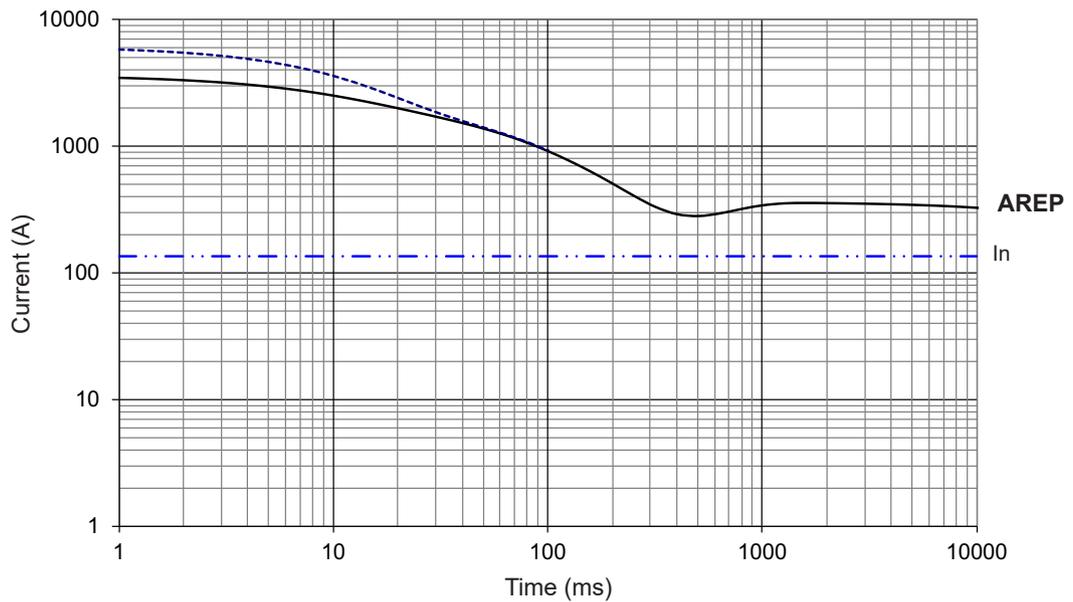


Influence due to short-circuit

Curves are based on a three-phase short-circuit.
For other types of short-circuit,
use the following multiplication factors.


	3 - phase	2 - phase L / L	1 - phase L / N
Instantaneous (max.)	1	0.87	1.3
Continuous	1	1.5	2.2
Maximum duration (AREP)	10 sec.	5 sec.	2 sec.

Two-bearing dimensions - Standard

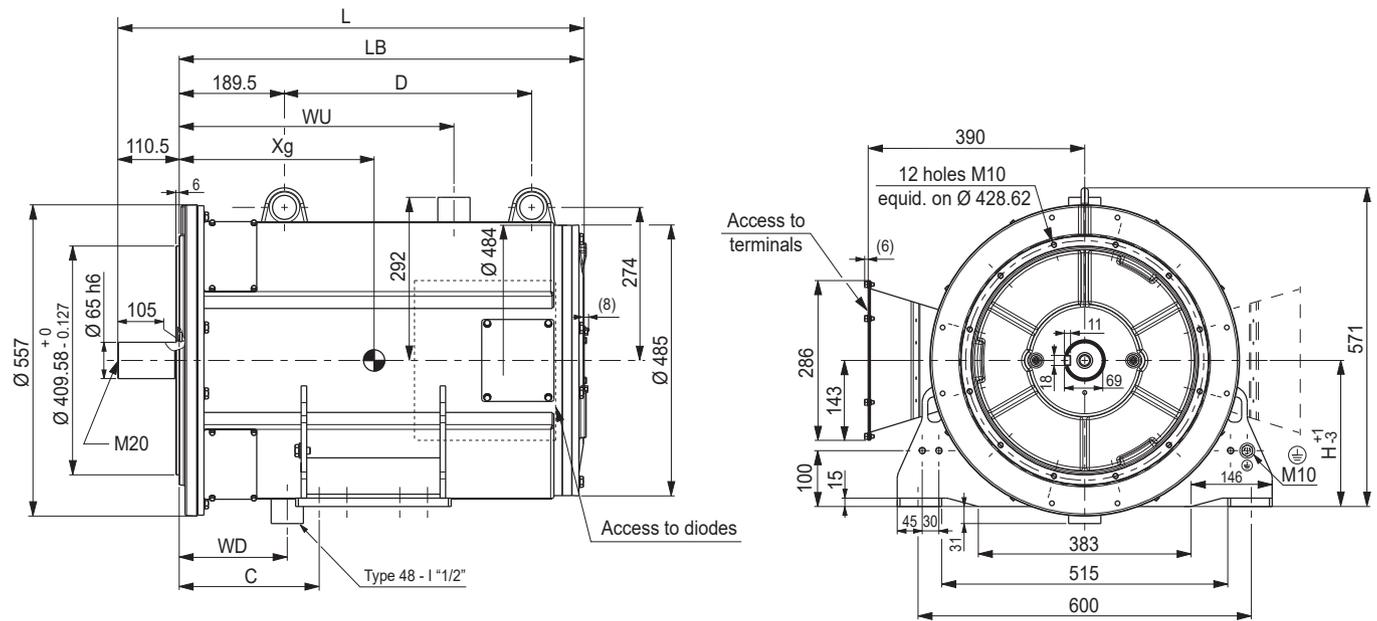

Dimensions (mm) and weight (kg)									
Type	L	LB	D	WU	Xg	WD	C	H	Weight
LSAH 44.3 M4	839.5	729	445	494.5	330	194.5	252	262	545
LSAH 44.3 M6	839.5	729	445	494.5	345	194.5	252	262	580
LSAH 44.3 L8	874.5	764	480	529.5	360	194.5	252	262	622
LSAH 44.3 VL12	974.5	864	580	629.5	370	194.5	252	262	750


Torsional analysis data

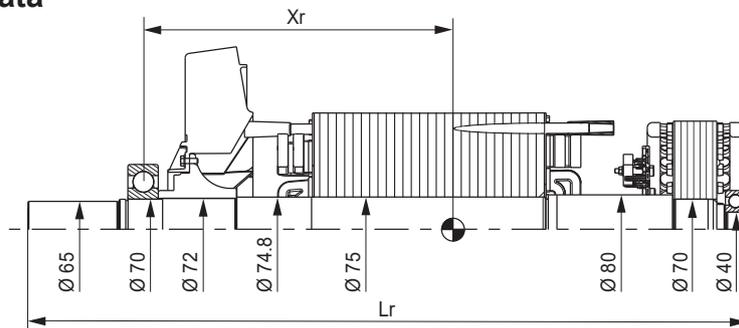

Centre of gravity: Xr (mm), Rotor length: Lr (mm), Weight: M (kg), Moment of inertia: J (kgm ²): (4J = MD ²)				
Type	Xr	Lr	M	J
LSAH 44.3 M4	332.5	828	135.5	0.984
LSAH 44.3 M6	347	828	147	1.098
LSAH 44.3 L8	364	863	160.5	1.206
LSAH 44.3 VL12	413	963	206	1.592

NOTE : Dimensions are for information only and may be subject to modifications. Contractual 2D drawings can be downloaded from the Nidec Power website, 3D drawing files are available upon request.
The torsional analysis of the transmission is imperative. All values are available upon request.

Single-bearing dimensions - Option

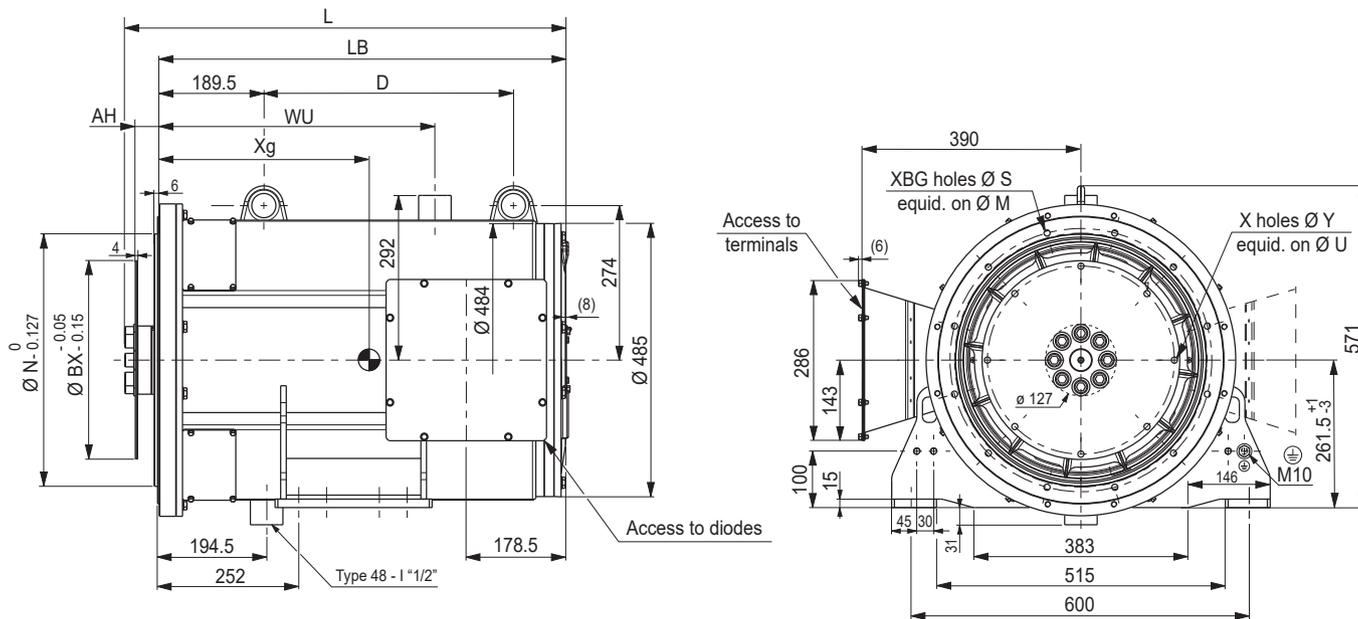

Dimensions (mm) and weight (kg)						
Type	L maxi*	LB	D	WU	Xg	Weight
LSAH 44.3 M4	810	729	445	494.5	330	545
LSAH 44.3 M6	810	729	445	494.5	345	580
LSAH 44.3 L8	845	764	480	529.5	360	622
LSAH 44.3 VL12	945	864	580	629.5	370	750

Coupling				
Flange	2	3	4	
Flex plate				
11 1/2	x	x	-	
10	x	x	x	
8	-	x	x	

* L maxi = LB + AH maxi + 19

Flange (mm)					Flex plate (mm)					
S.A.E.	N	M	S	XBG	S.A.E.	BX	U	X	Y	AH
4	361.95	381	11	12	11 1/2	352.42	333.38	8	11	39.6
3	409.58	428.62	11	12	10	314.32	295.28	8	11	53.8
2	447.68	466.72	11	12	8	263.52	244.48	6	11	62

For torsional analysis data or other request: consult us.

NOTE : Dimensions are for information only and may be subject to modifications. Contractual 2D drawings can be downloaded from the Nidec Power website, 3D drawing files are available upon request.



www.nidecpower.com

Connect with us at:



© 2026 Moteurs Leroy-Somer SAS. The information contained in this brochure is for guidance only and does not form part of any contract. The accuracy cannot be guaranteed as Moteurs Leroy-Somer SAS have an ongoing process of development and reserve the right to change the specification of their products without notice.

Moteurs Leroy-Somer SAS. Headquarters: Bd Marcellin Leroy, CS 10015, 16915 Angoulême Cedex 9, France. Share Capital: 32,239,235 €, RCS Angoulême 338 567 258.